




Display Village plan

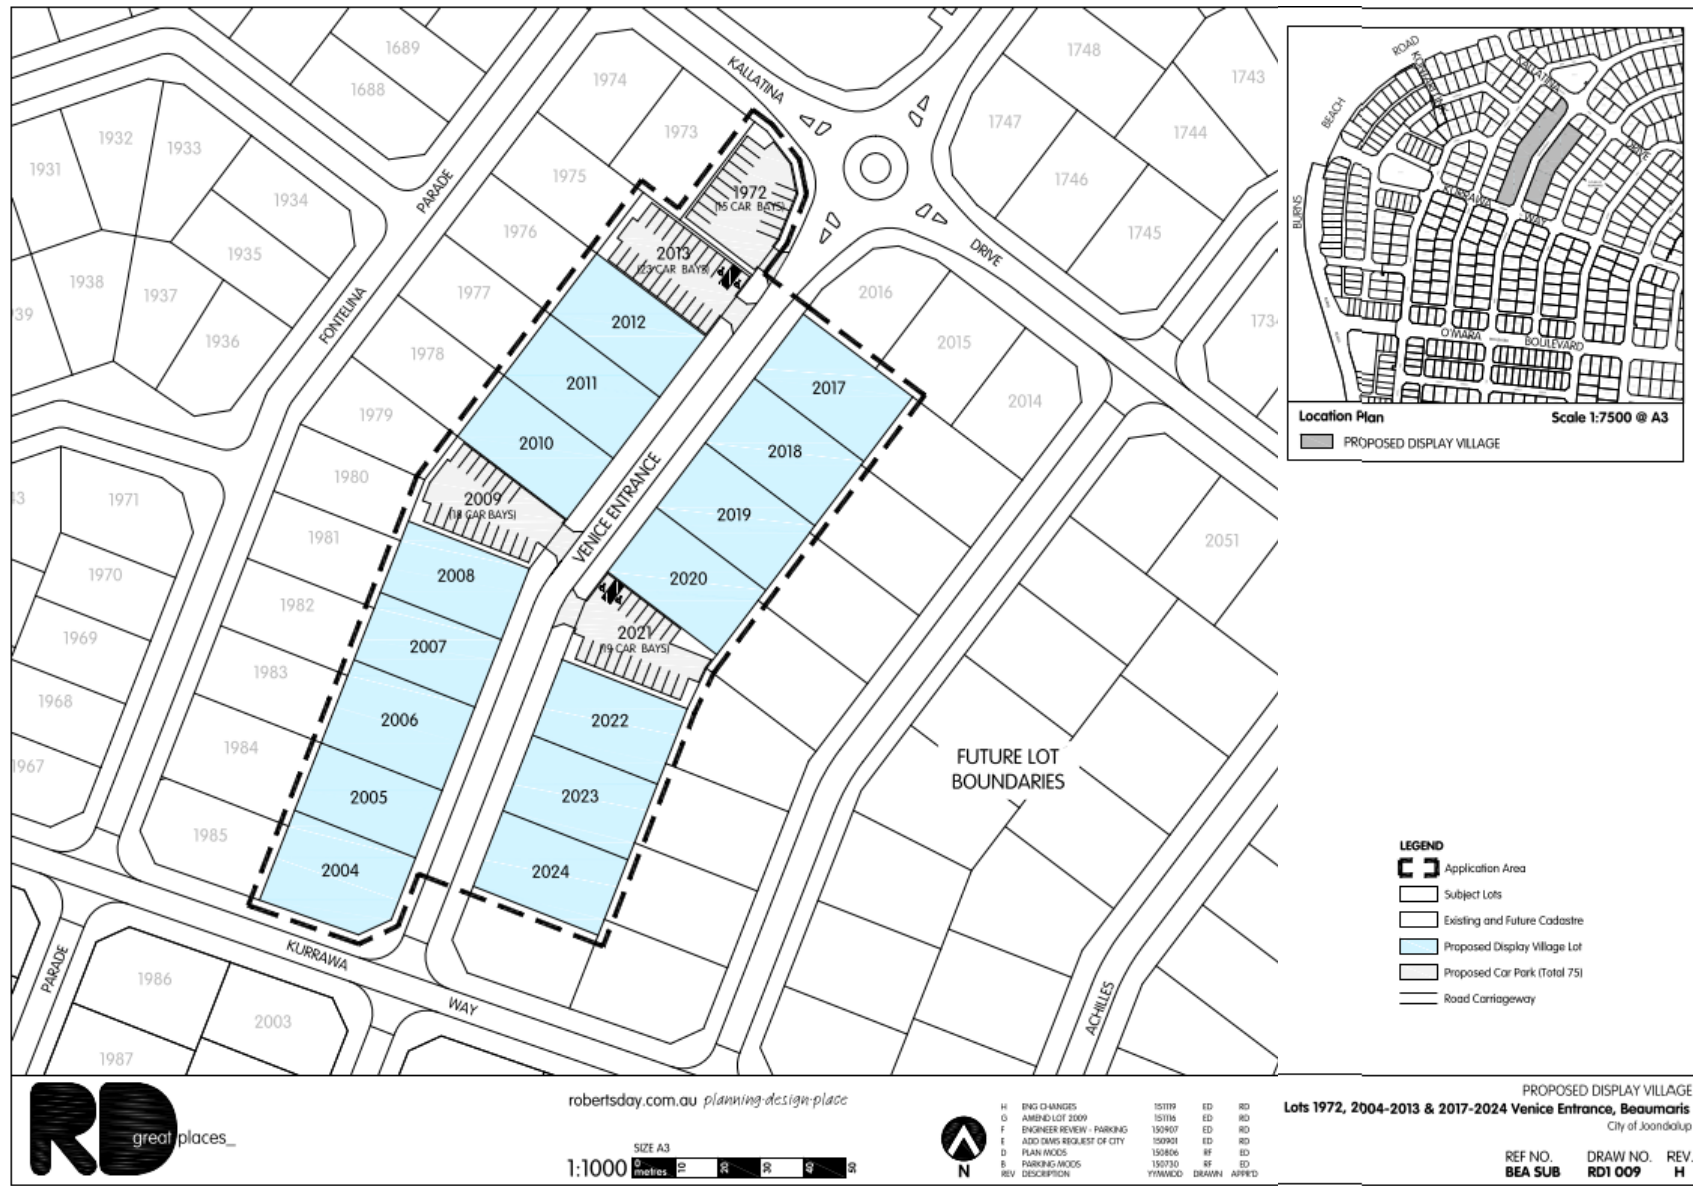

Car parking plan

ATTACHMENT 3


LEGEND

	EARTHWORKS LEVEL
	EXISTING RETAINING WALL
	PROPOSED RETAINING WALL
	DISABLE PARKING (4 SPACES)
	165mm CONCRETE WHEEL STOPS TO AUSTRALIAN STANDARD AS2890.1:2004
	100 ECA TREATED TIMBER BOLLARDS AT 15m CENTRES WITH CONCRETE FOOTINGS TO CITY OF JOONDALUP STANDARDS
	SOAKWELL AS PER TYPICAL SOAKWELL DETAIL



NOTES

- 1 TOTAL NO OF CAR PARKS - 75
- 2 ALL KERBING IN SALES CAR PARK TO BE SEMI-MOUNTABLE AS PER CW-STD-082 REV 4 DRAWING
- 3 SALES CAR PARKS TO CONSIST OF 200mm THICK LIMESTONE BASE AND 40mm THICK BLACK ASPHALT CROSSOVERS TO BE GREY CONCRETE TO CITY OF JOONDALUP STANDARDS
- 4 SMALL CAR BAYS TO INCLUDE LINEMARKING THAT STATES "SMALL CARS ONLY"
- 5 RETAINING WALLS NOT TO BE UNDERMINED DURING CONSTRUCTION CONTRACTOR TO STABILISE AS REQUIRED

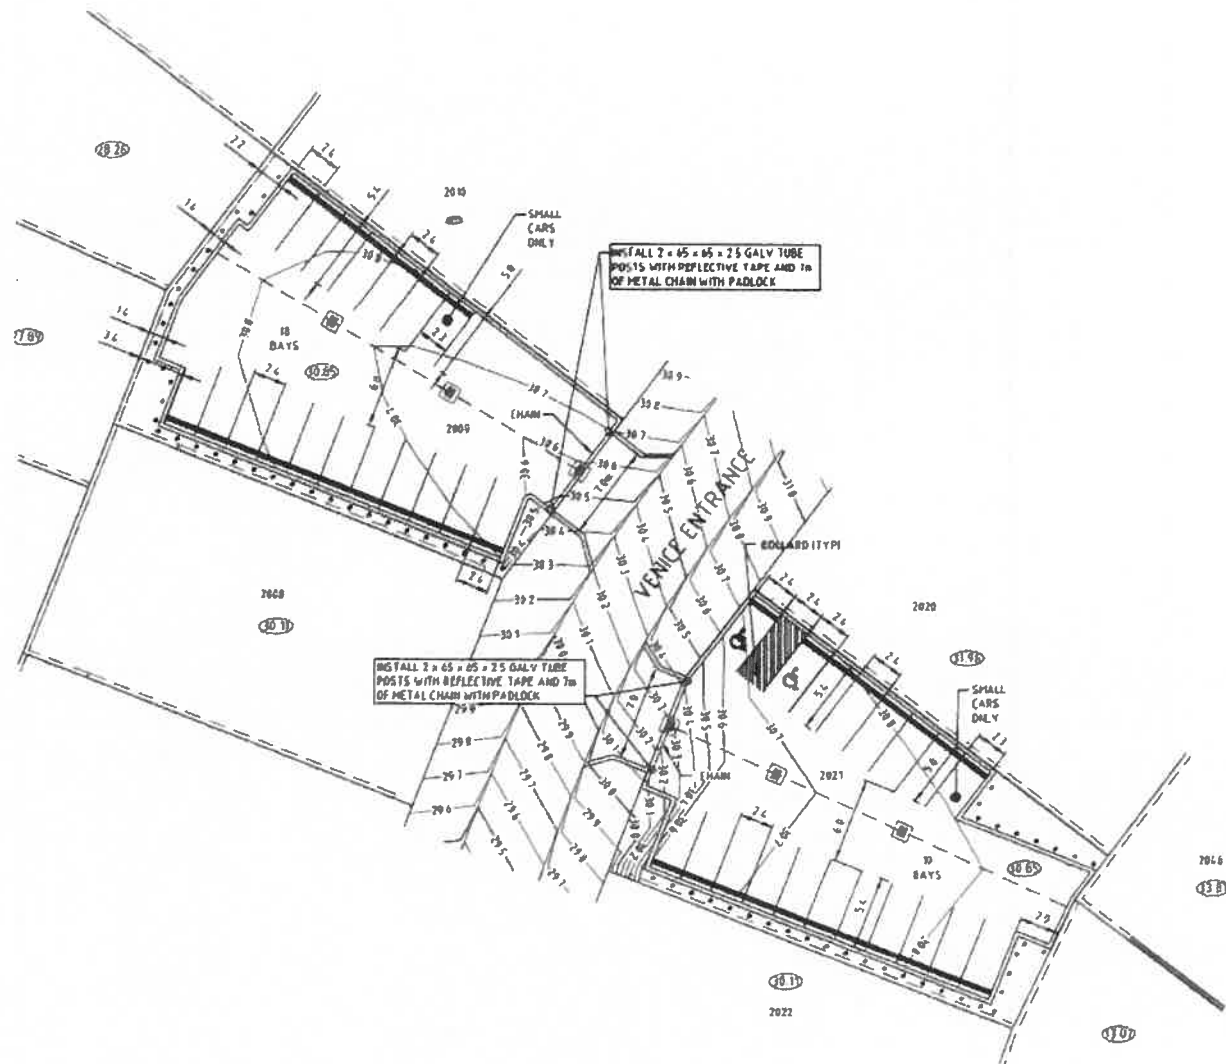

LEGEND

	EARTHWORKS LEVEL
	EXISTING RETAINING WALL
	PROPOSED RETAINING WALL
	DISABLE PARKING (4 SPACES)
	185mm CONCRETE WHEEL STOPS TO AUSTRALIAN STANDARD AS2890.1:2004
	100 CCA TREATED TIMBER BOLLARDS AT 15m CENTRES WITH CONCRETE FOOTINGS TO CITY OF JOONDALUP STANDARDS
	SOAKWELL AS PER TYPICAL SOAKWELL DETAIL

NOTES

- 1 TOTAL NO OF CAR PARKS - 75
- 2 ALL KERBING IN SALES CAR PARK TO BE SEMI-MOUNTABLE AS PER CW-S10-002 REV 4 DRAWING
- 3 SALES CAR PARKS TO CONSIST OF 200mm THICK LIMESTONE BASE AND 40mm THICK BLACK ASPHALT CROSSOVERS TO BE GREY CONCRETE TO CITY OF JOONDALUP STANDARDS
- 4 SMALL CAR BAYS TO INCLUDE LINEMARKING THAT STATES "SMALL CARS ONLY"
- 5 RETAINING WALLS NOT TO BE UNDERMINED DURING CONSTRUCTION CONTRACTOR TO STABILISE AS REQUIRED

Car parking plan

