








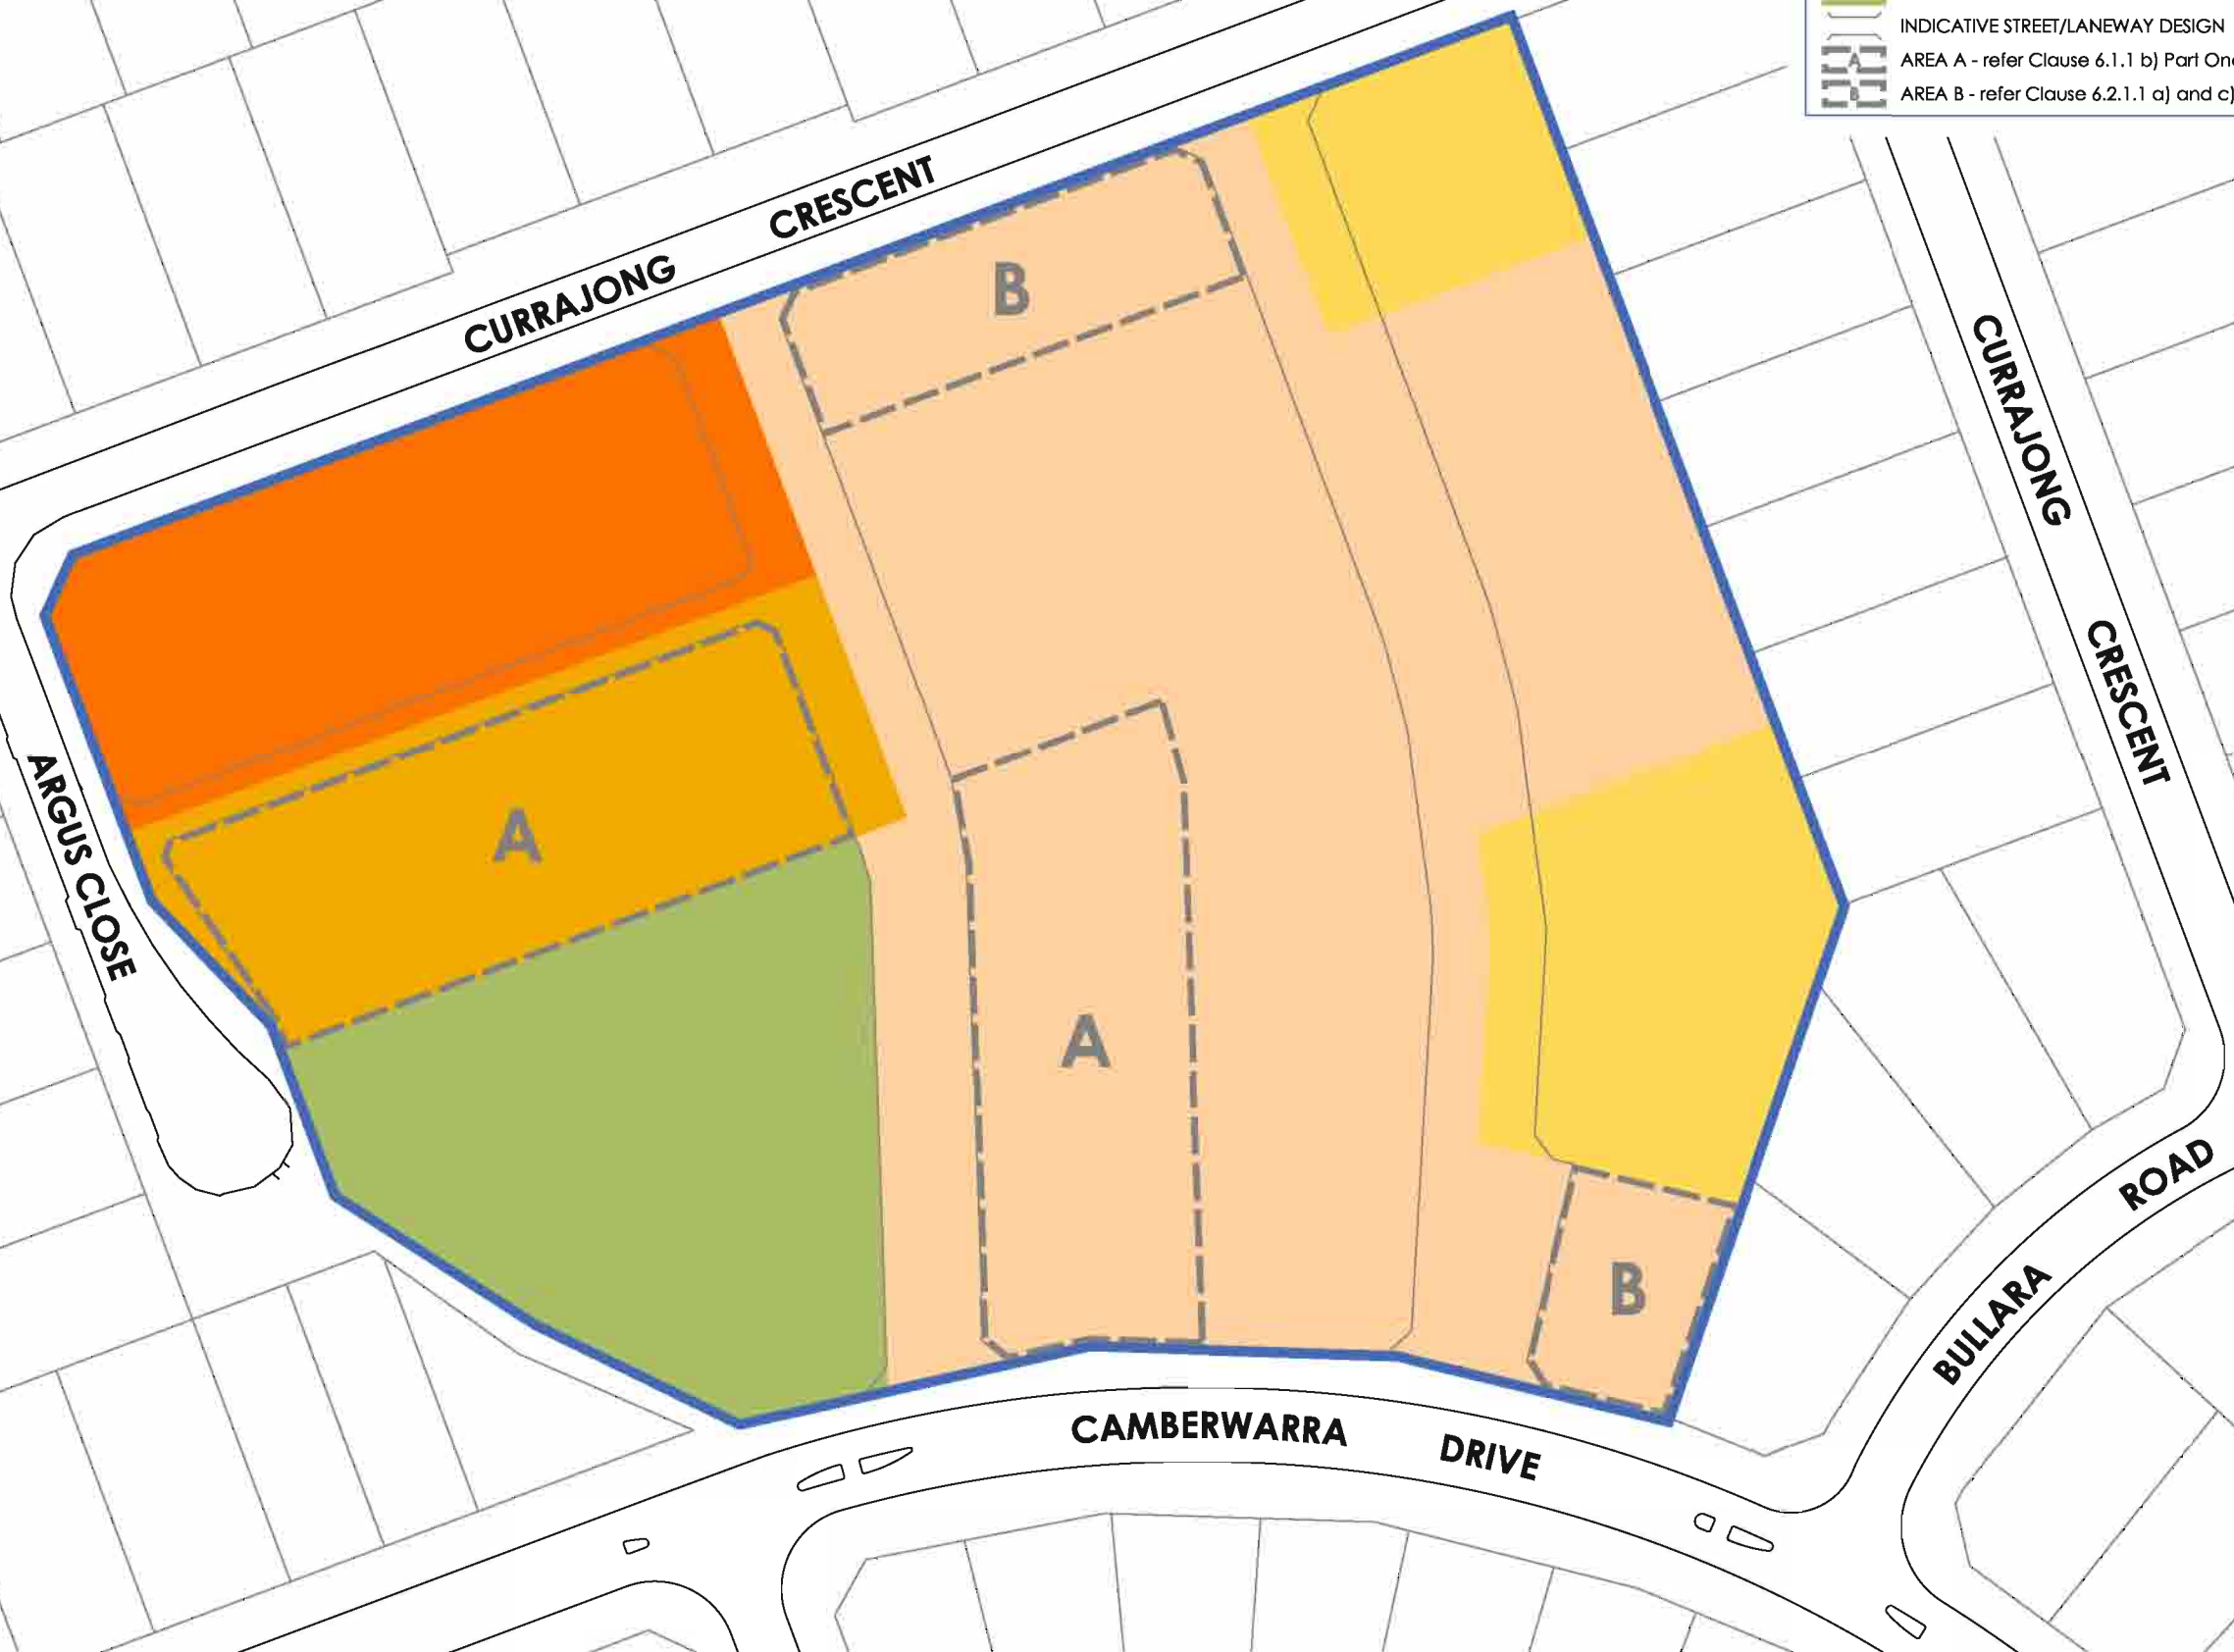




-  LOCAL STRUCTURE PLAN BOUNDARY
 RESIDENTIAL R30
 RESIDENTIAL R40
 RESIDENTIAL R50
 RESIDENTIAL R60
 PUBLIC OPEN SPACE
 INDICATIVE STREET/LANEWAY DESIGN
 AREA A - refer Clause 6.1.1 b) Part One - Statutory Planning
 AREA B - refer Clause 6.2.1.1 a) and c) Part One - Statutory Planning



Whilst all care has been taken in the compilation of this document, Rowe Group disclaim any responsibility for any errors or omissions. This document is and remains the property of Rowe Group and may not be reproduced or transmitted, in whole or in part, without the written consent of Rowe Group. All areas and dimensions are subject to survey.

PROVISIONS:

Unless otherwise defined on this Local Development Plan, all development shall be in accordance with the *City of Joondalup Local Planning Scheme No. 3*, The *Residential Design Codes of WA* (the 'R-Codes') and the *Camberwarra Local Structure Plan*.

GENERAL

1. The requirements of the R-Codes and *Camberwarra Local Structure Plan* are varied as shown on the Local Development Plan.
2. Single Houses that comply with this Local Development Plan do not require development approval.

BOUNDARY SETBACKS

3. A 2.0 metre minimum primary street setback applies to Currajong Crescent replacing clause 6.3.1.1.a dot point one of the *Camberwarra Local Structure Plan*.
4. Nil side setbacks to boundaries are permitted, with no maximum length to both side boundaries replacing clause 6.3.1.2.a dot point one of the *Camberwarra Local Structure Plan*.
5. Boundary walls shall not be higher than 3.5 metres replacing clause 6.3.1.2.a dot point three of the *Camberwarra Local Structure Plan*.

GARAGES/CARPORTS

6. Garages / Carports are to be located as designated.
7. Garages / Carports are to be setback a minimum of 4.0 metres from Summit Lane modifying the 1.5 metre setback as contained in clause 6.3.1.3.a of the *Camberwarra Local Structure Plan*.
Note: Garage / Carport setbacks should be determined on a site specific basis and may require greater than the minimum identified where constrained by topography and retaining wall locations.


FENCING

8. Front fences within the primary street setback area being a maximum height of 900mm above natural ground level, measured from the primary street side of the front fence replacing clause 6.1.6.b of the *Camberwarra Local Structure Plan*.

This Local Development Plan has been approved the City of Joondalup under clause 52(1) (a) of Schedule 2 - Deemed Provisions of the *Planning and Development (Local Planning Schemes) Regulations 2015*, *City of Joondalup Local Planning Scheme No. 3*.

Signature: _____

Date: 14/3/2019

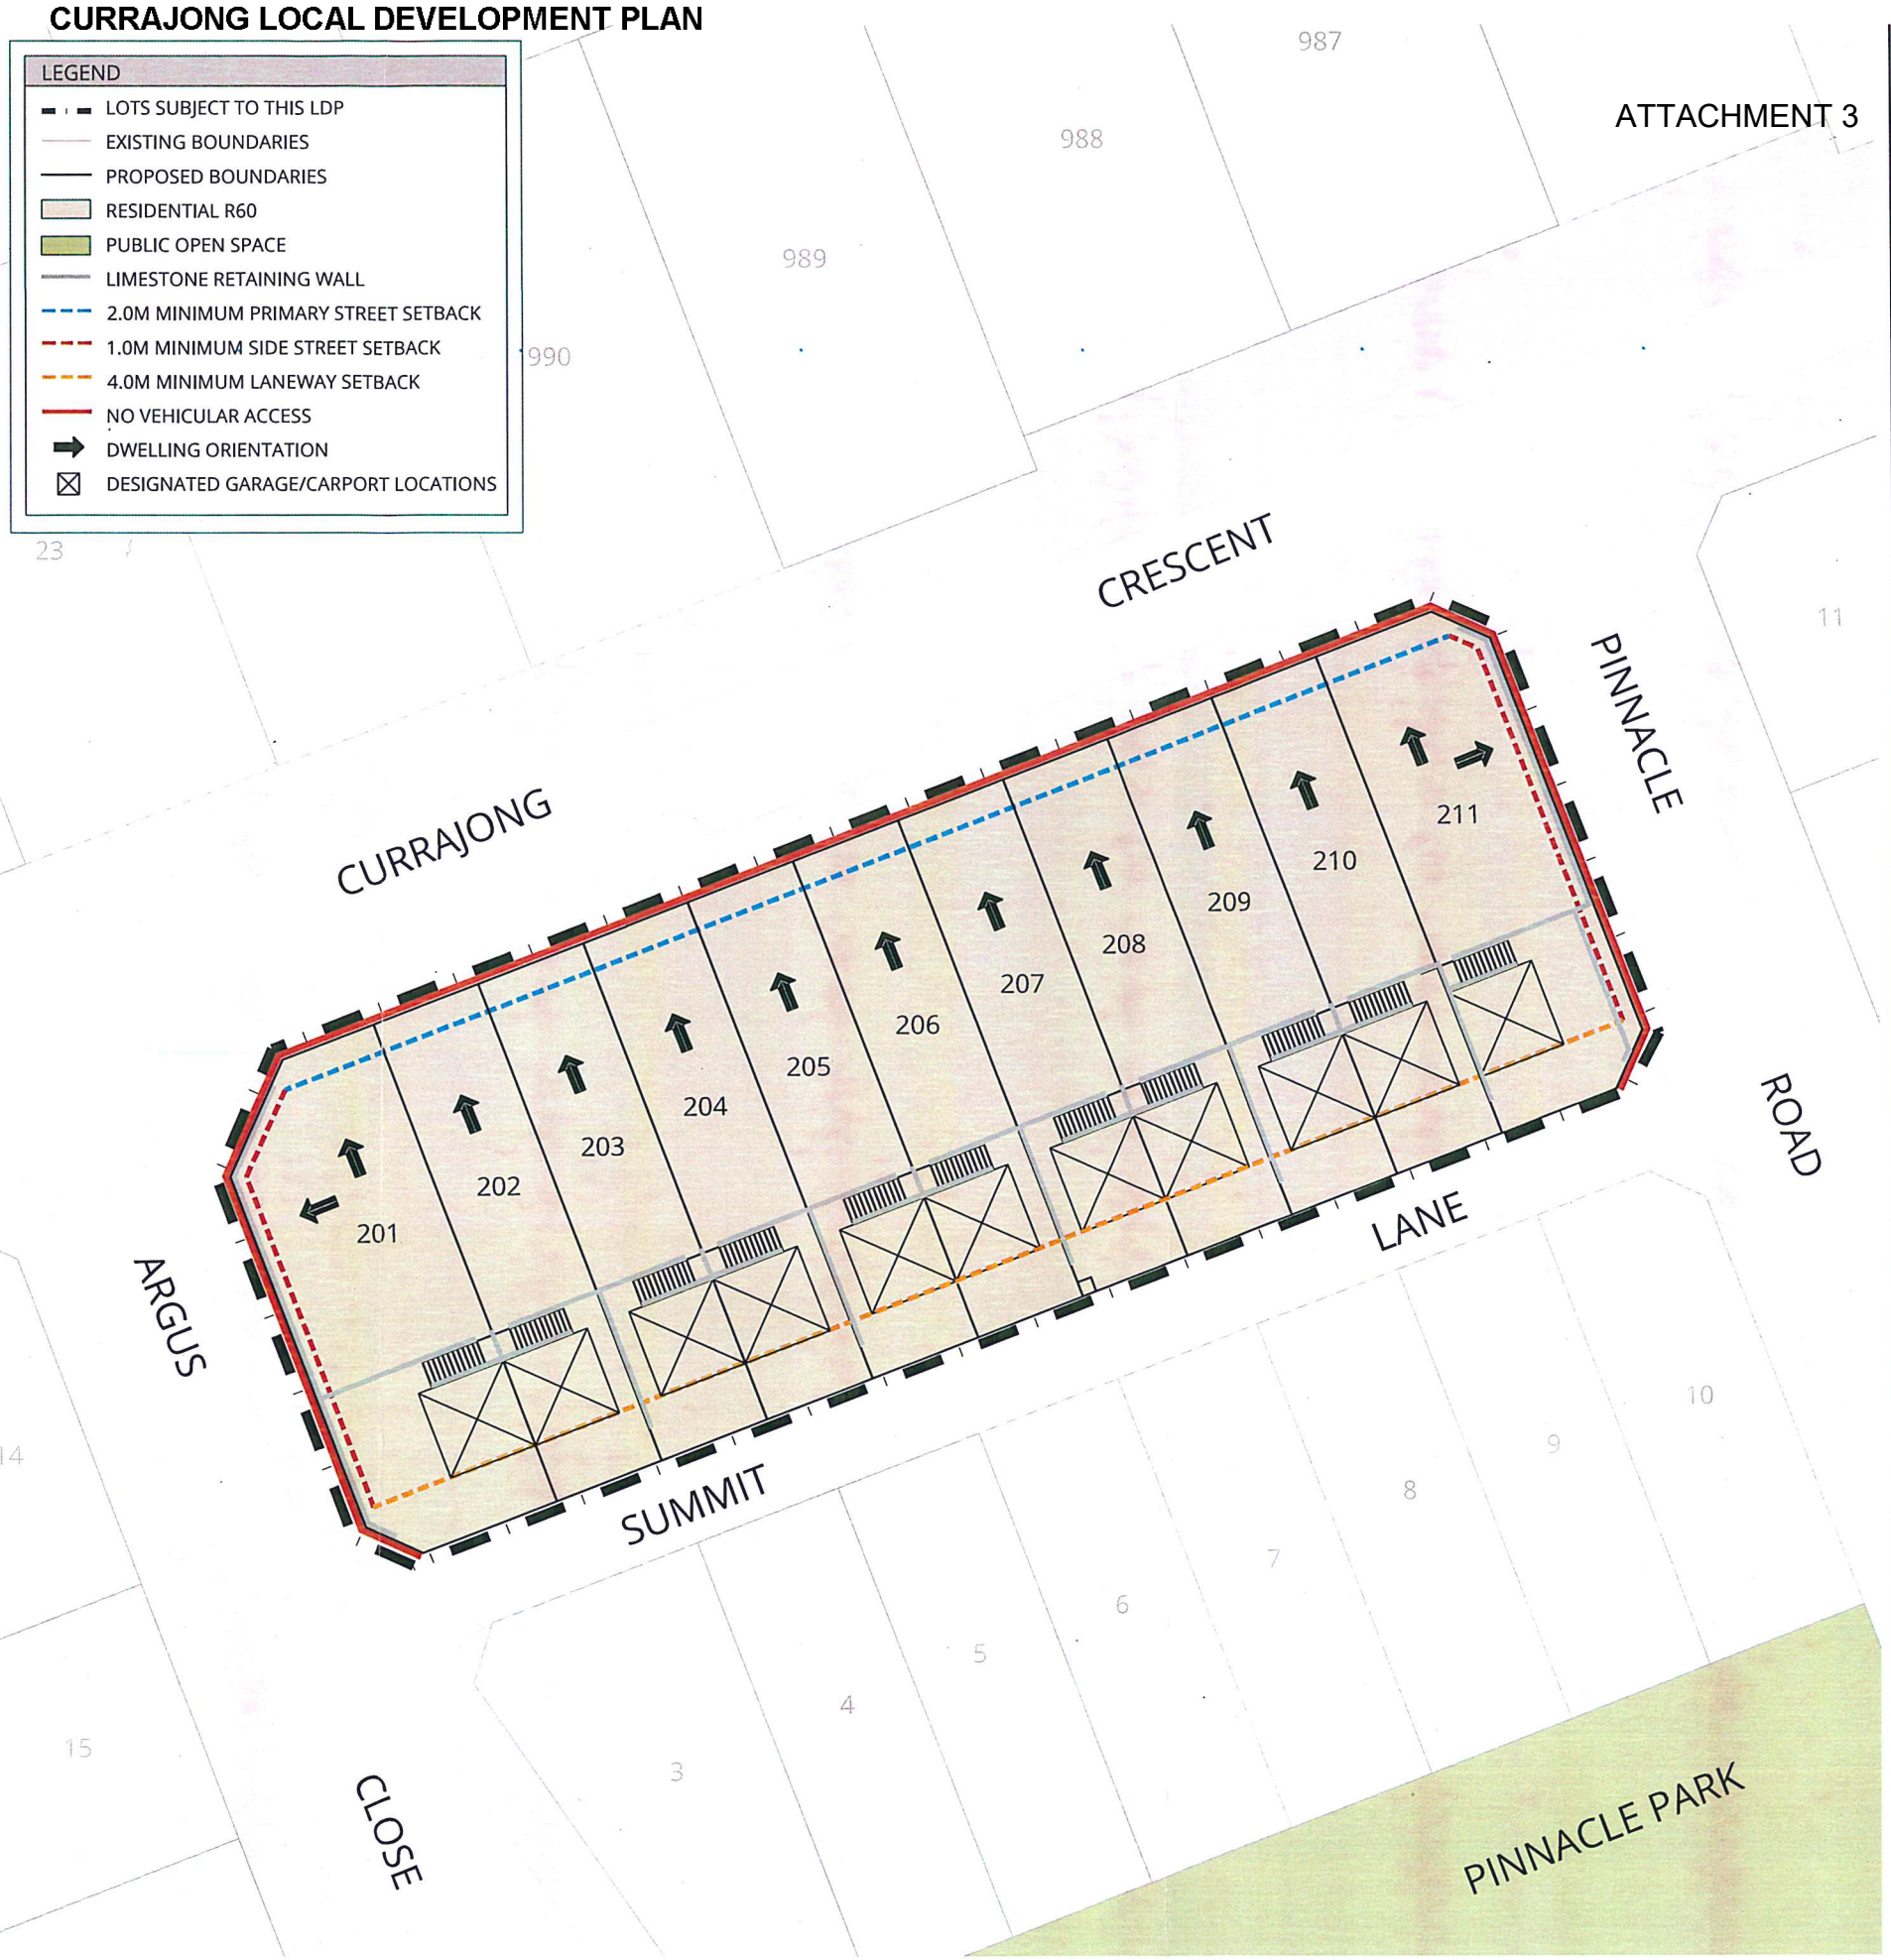

CURRAJONG LOCAL DEVELOPMENT PLAN

LOTS 201 - 211 CURRAJONG CRESCENT
THE RISE, CRAIGIE



0 12.5 m
SCALE @ A3: 1:500
8918-LDP-01-E

